

SILVER SD SERIES PoE White Light ILLUMINATOR

S06DP-W White Light Illuminator

- Deliver high power infrared light for CCTV & IP camera at night time and improve performance of camera to get colorful pictures.
- PoE (Power over Ethernet) powered.
- 30,000 hours lifetime of LED.
- 3 years warranty



Professional Design



- Two stages of constant current circuit avoid LED away from instantly impulse impact when started.
- Low failure rate of products is guaranteed by the professional in-house optimized independent circuit technology, which has been widely used in our LED illuminators for more than 5 years.
- Wide edge of silica gel circle and water stop line ensure IP66 waterproof and dustproof level.
- Twice direct cooling heat sink processing enable to increase the cooling coefficient and prolong the service life of the product.
- Patent design hexagonal spherical light sensor more accurately responses ambient brightness and improves accuracy of automatic light control.
- Flexible angle adjustable bracket can extend the illuminance range widely.
- Robust cooling fin design is available the illuminator working at -40°C to 50°C.
- Super energy saving circuit with low electrical power consumption.

Qualified Material

- Super power dot-matrix LED with strong light effect, long service life and low light decline feature.
- High efficient twice optical lens processing achieves 90% of the luminous efficiency.
- The housing adopts high thermal conductivity aluminum to enhance heat dispersion property.
- Stainless steel bracket and screw ensure low maintenance.

Wide Range of Application

- Recommended for security at ports, railway systems, border, prisons, traffic LPR/ANPR, ITS as well as large public places lighting.

Basic Function

- To improve performance of the weak light camera, thereby enhancing the picture effects at night.
- Conventional night monitoring
- The function of video analysis at night
- Reduce signal noise and other image distortion
- Reduce the network bandwidth requirements
- Energy saving by power factor correction
- Reduce the equipment cost
- Lower cost of installing and wiring

Viewing picture at night



With white light

Without white light

Picture




Product certificate



Technical Specification

LED type	6pcs high power white light LED
Color Temperature	3000-3500K/5500-6000K
Luminous Flux	900lm
Voltage	PoE IEEE 802.3af
Power Consumption	11W
Day/Night Switch	Auto (build in photocell)
Cable	IP66 RJ45 jack and Cat.5e 50cm
Mounting	Wall mounting "U" bracket
Temperature	-40°C to 50°C
Grade of Protection	IP66
Color	Beige
Housing	Aluminium
Panel	High light transmittance toughened glass
N.W	1KG
G.W	1.3KG
Dimension	110*84*90mm
Packing Dimension	180*160*135mm

Drawing

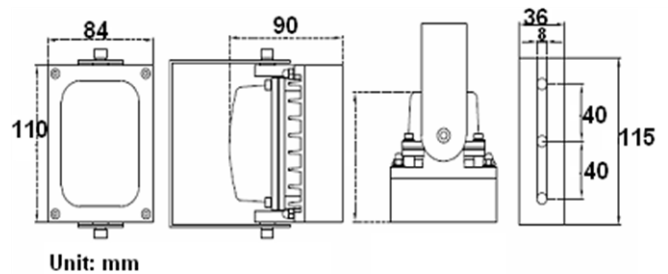

Model for selection

Model	Beam Angle	Viewing Distance
S-S06DP-15-W	15°	100m
S-S06DP-30-W	30°	80m
S-S06DP-45-W	45°	60m
S-S06DP-60-W	60°	40m
S-S06DP-90-W	90°	25m
S-S06DP-120-W	120°	15m

*Viewing distance is tested by Sony 1/3" CCD Camera with 0.01LUX. .

To achieve the distance needed, please pay attention to your camera specification and lens before purchase. It is normal phenomenon that distance may vary due to different cameras and lens.